


W082065AEA

WORKPRO

OPERATOR'S MANUAL

48-INCH 5-SHELF STORAGE UNIT

48"W * 24"D * 72"H

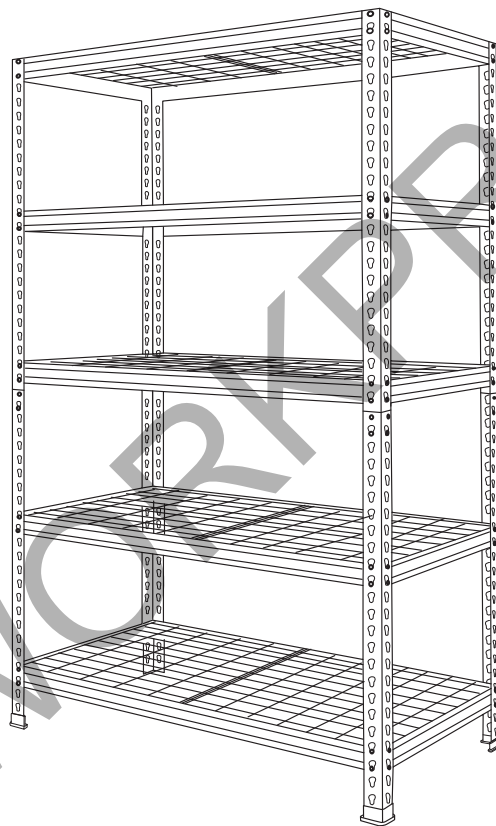

USE PRECAUTION
For your safety



INSTRUCTION
MANUAL
Read and understand



EYE PROTECTION
Must be worn



PROTECTIVE GLOVES
Must be worn when
handling tool



CAUTION: Read and follow all safety rules and operating instructions before first use of this product.

NOTE: Ensure all components are present. If any components are missing, do not proceed with assembly. Please send an email to service@greatstartools.com or call 877-876-7562

SAVE THIS MANUAL FOR FUTURE REFERENCE

SAFETY INFORMATION

Please read and understand this entire manual before using the product.

CAUTION


- Do not exceed 800lbs per shelf. Be aware of dynamic loading! Sudden load movement may briefly create excess load causing product failure.
 - Evenly distribute the weight on each shelf, and keep the heaviest loads on the bottom shelf and small lighter items on the upper level.
 - Use only on flat, level and hard surface capable of supporting the shelving and any items placed on it. Maintain proper footing and balance at all times.
 - Keep bystanders out of the area during assembly.
- This product is not a toy. Do not allow children to play with, on or near the unit.

WARNING

- Do not stand on, step on, or alter this unit for anything outside the designed function of storage.
- Use care when handling and assembling metal plates.
- The metal may have sharp edges or corners. The use of protective gloves is recommended.
- Always remember to use proper lifting techniques when moving the boxed or assembled unit.

COMPONENTS

Ensure all components are present. If any components are missing, do not proceed with assembly.

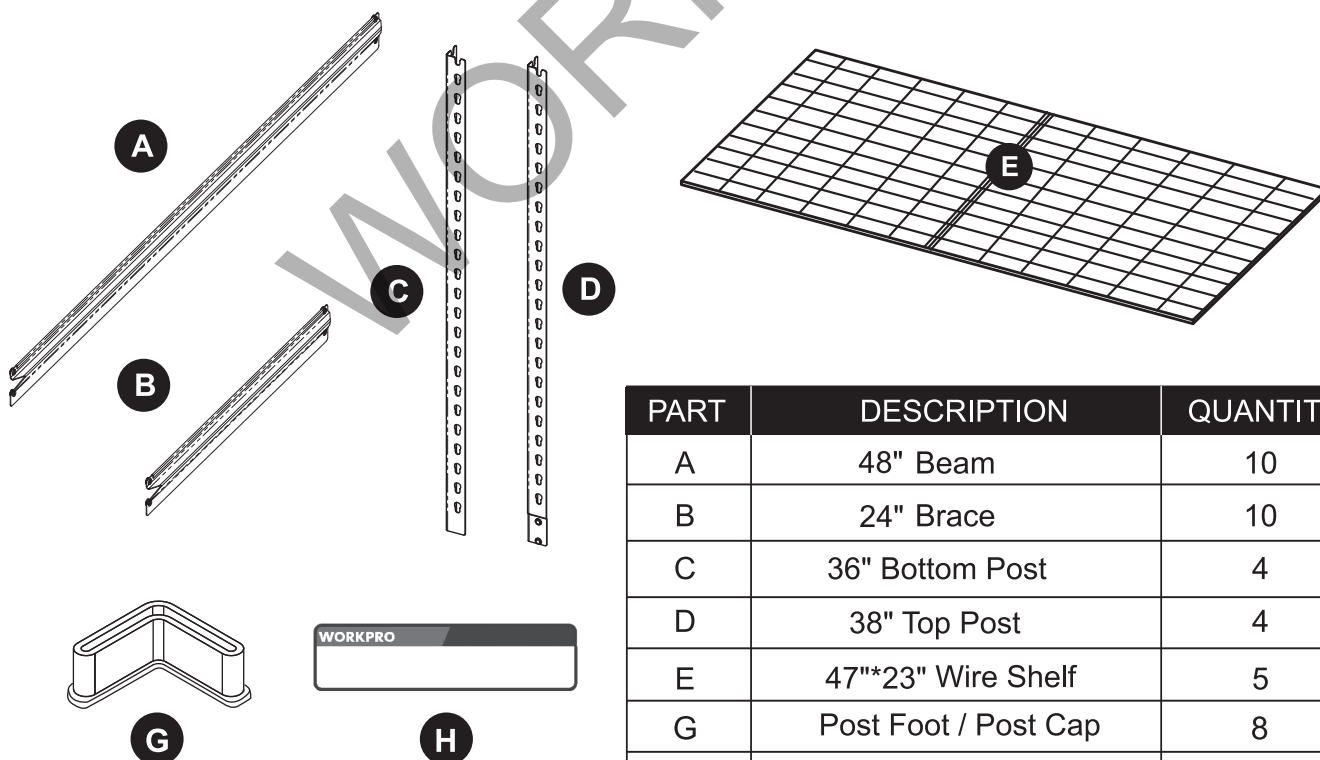


PART	DESCRIPTION	QUANTITY
A	48" Beam	10
B	24" Brace	10
C	36" Bottom Post	4
D	38" Top Post	4
E	47"*23" Wire Shelf	5
G	Post Foot / Post Cap	8
H	Signature Sticker	24

Tool Required for Assembly (not included): Rubber Mallet and Protective Gloves

Pre-Installation


Before beginning assembly, read through the instructions and make sure all parts are presented.

- Identify carefully the installation direction of the accessories.
- Assembly of this unit is done by fitting the rivets of the beams (A) and braces (B) into the keyhole slots of the posts (C) (see Fig a).
- Beams (A) / Braces (B) must be installed with the longer ledge on top and the shorter ledge at the bottom (see Fig b).
- The distance between the two adjacent mounting keyholes of the pole is 1-1/2"(38mm)(see Fig e).
- The height of each layer can be selected and adjusted according to your needs or desired, It is recommended that 11 holes be spaced in each layer.
- Two extra wires in the middle of each shelf must be on top (see Fig c).
- The bottom shelf assembly should be installed into the second keyhole slots at the bottom of posts.
- The top shelf assembly should be installed into the first keyhole slots at the top of posts.
- A rubber mallet may be used to tap down on the top of beams and braces to properly seat the rivets into the narrow end of the keyhole slot (see Fig d).
- A visual inspection should be made to ensure that the rivets are properly engaged into the keyhole slot.
- There are two options:
 1. One is to build a whole of 5 tiers with a height of 72" .
 2. Another can be split into 2 separate shelves as individual unit. One unit will have 3 shelves with 36" height and the other will have 2 shelves with 38" height.
- The attached signature sticker label can be affixed to the beam /brace as required for easy identification (see Fig g).
- In order to protect the floor, the post foot can be covered into the post before installation (see Fig f).

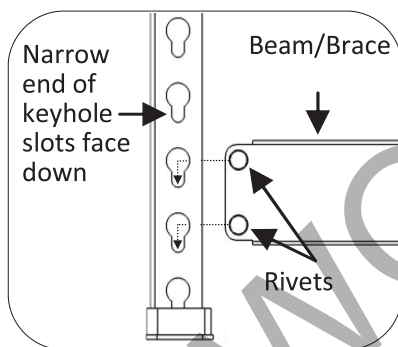


(Fig a)

Keyhole slots face down



(Fig b)


Longer ledges must be on top

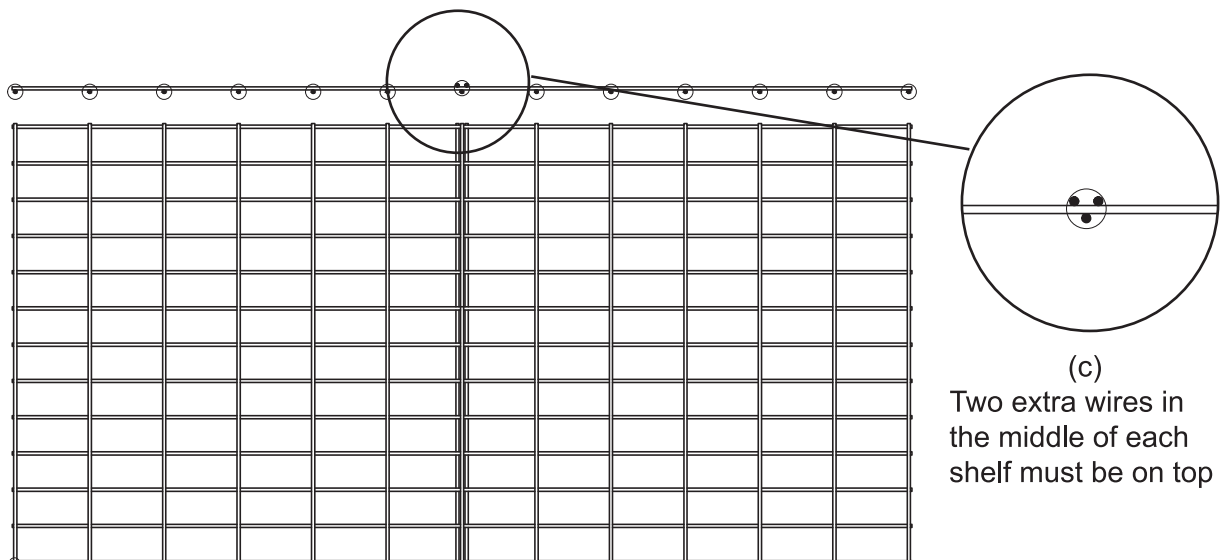

(c)


Two extra wires in the middle of each shelf must be on top

Pre-Installation

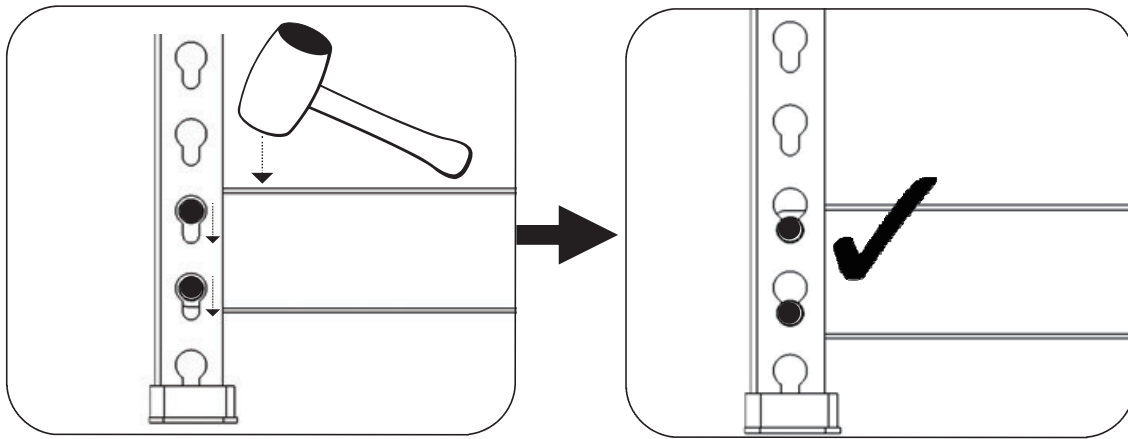


(Fig d)

Rivets should be seated properly into the slot

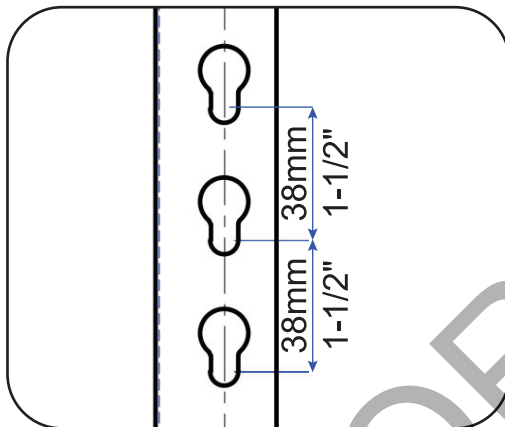


(Fig e)

The distance between the two adjacent holes is 38mm(1-1/2")

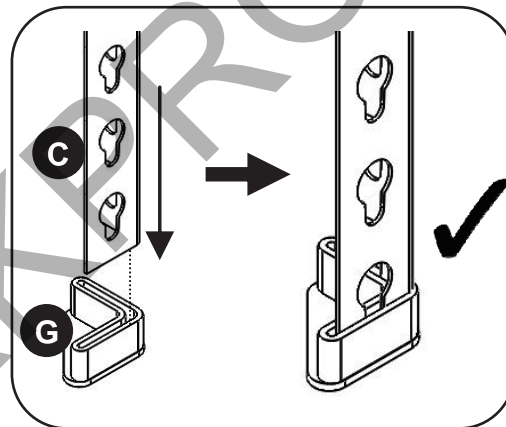


(Fig f)

Assemble the post foot or post cap

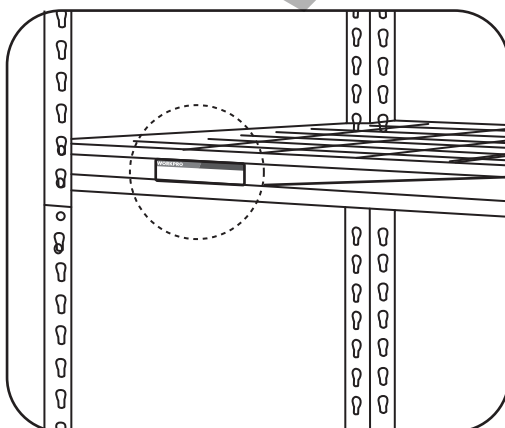

(Fig g)

The attached signature sticker can be affixed to the beam as required for easy identification




ASSEMBLY

Step 1

- Slide properly the rivets of brace (B) into bottom posts (C) of your desired location with the key slot pointing down and shelf ledge of brace (B) facing up. Tap lightly to seat rivets.


Note: Make sure all the rivets are fully seated into the post slots. You may turn to a rubber mallet (not included) for achieving this target. This applies to all the rivets used in this unit.

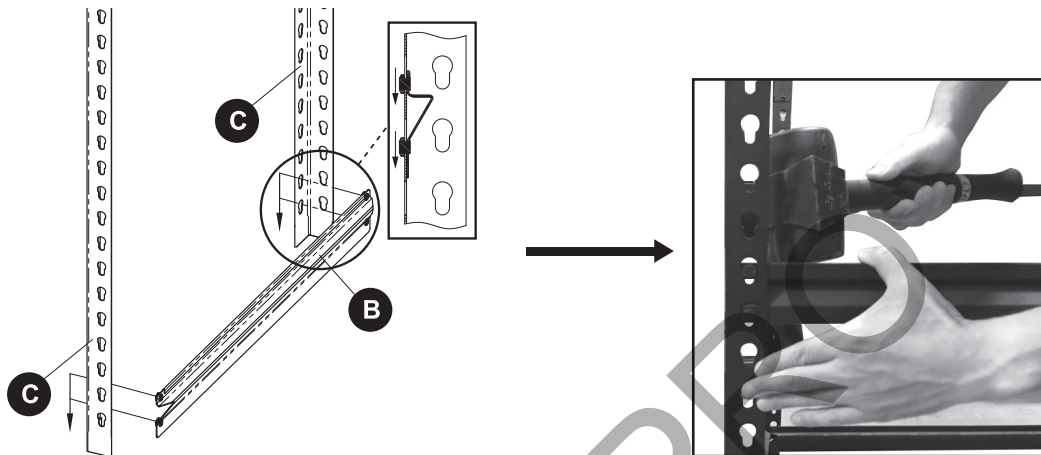

Step 2

- Repeat the previous step 1 to attach beams (A) and brace (B) to bottom posts (C) until the first level is assembled.


Note: Each of the beams (A) and braces (B) on the same level should be at the same height. You can adjust to the same height by counting the number of holes

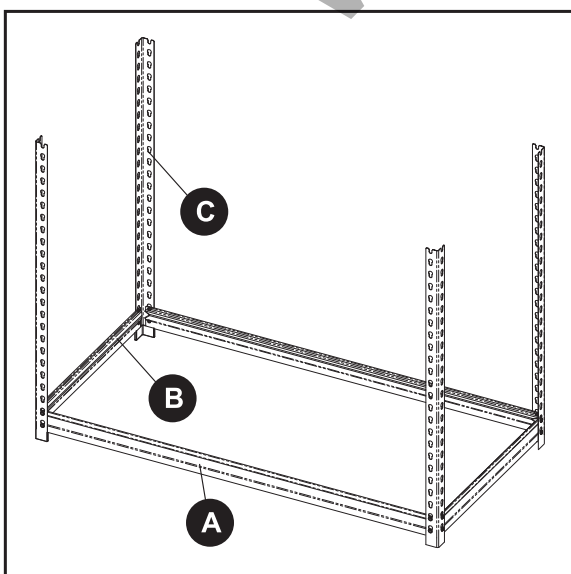

Step 3

- Add wire shelf (E) on the shelf ledge of the level previously built.


Note: Make sure the two extra wires in the middle of each shelf are on the top. This can ensure that the force surface of the shelf has sufficient support up to 800lbs

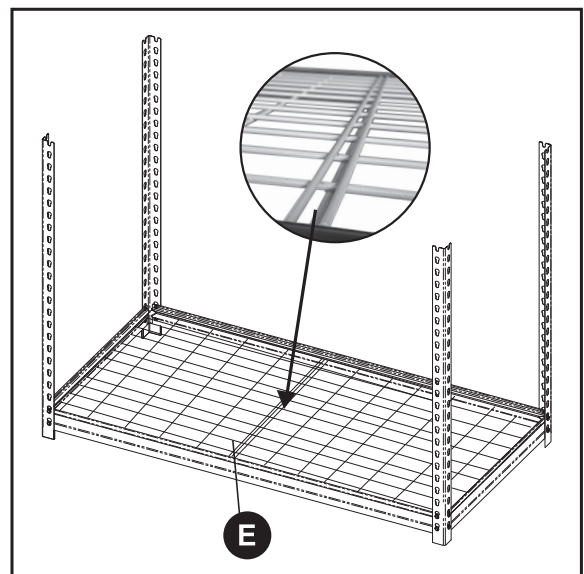

ASSEMBLY


Step 4

- Repeat the previous steps to attach beams (A) and braces (B) to posts (C) and add wire shelf (E) until the first two levels are assembled.

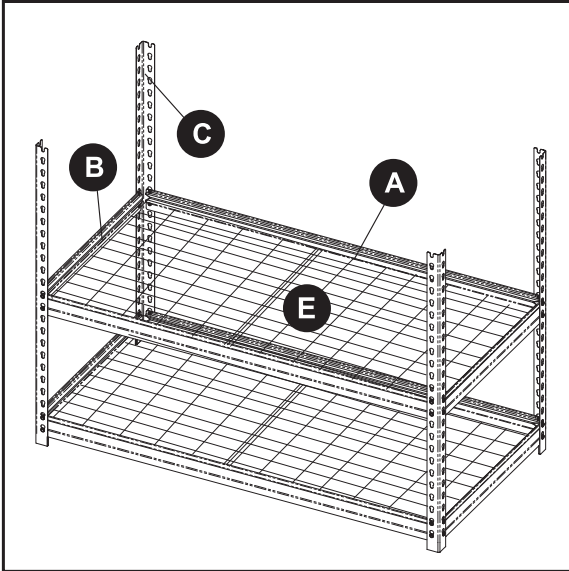


Step 5

- Insert and press down top posts (D) with slot pointing down to bottom posts (C).

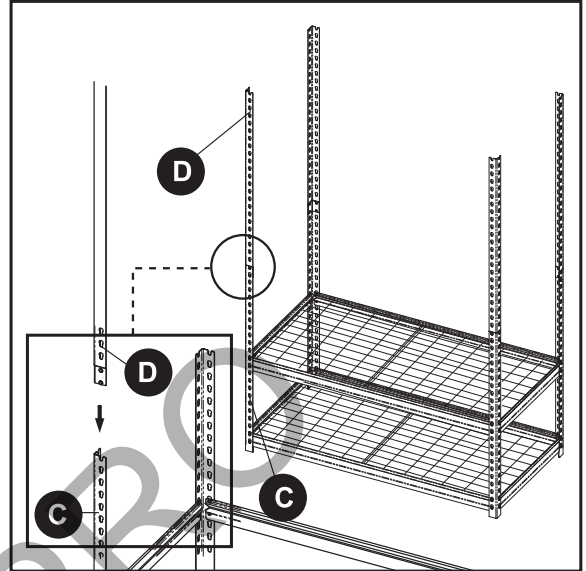


Step 6

- Repeat steps 1-3 to form the third to fifth levels.

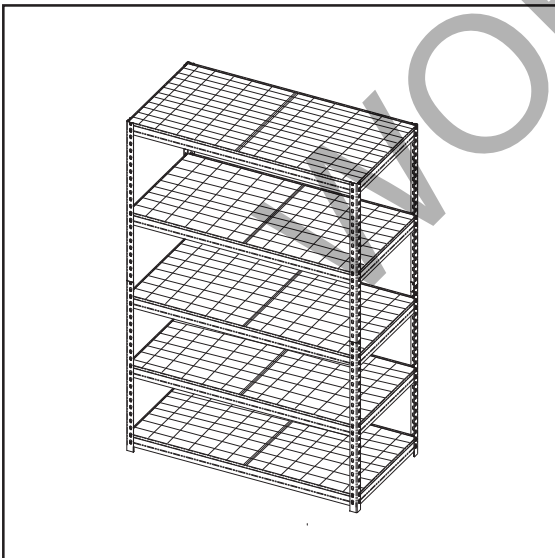

Alternative Assembly

- Using the same assembly method, the top shelves can be assembled on the floor, forming two short shelves. The heights are 36 "and 38"

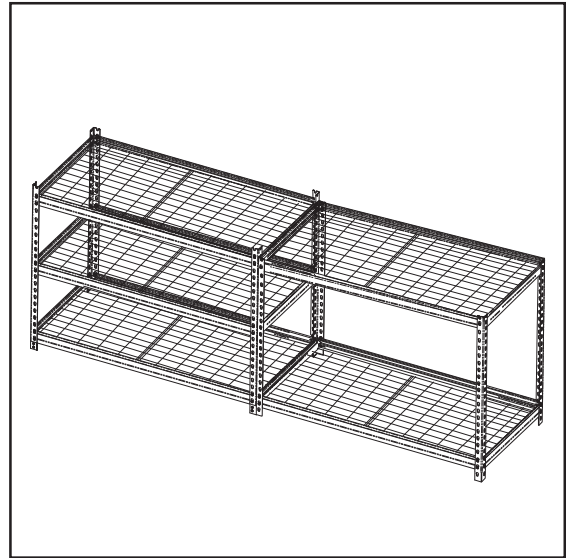

Maximum Weight Limit:
800 lbs per shelf evenly distributed

Questions, problems, damage or missing parts
Contact us for assistance:
service@greatstartools.com
877-876-7562



Distributed by:
GREATSTAR INDUSTRIAUSA, LLC
ADD: 9836 Northcross Center Court, Suite A,
Huntersville, NC 28078, USA

MADE IN VIETNAM