


W082094A

WORKPRO

METAL GARAGE STORAGE CABINET

31.5"W x 15.75"D x 71"H

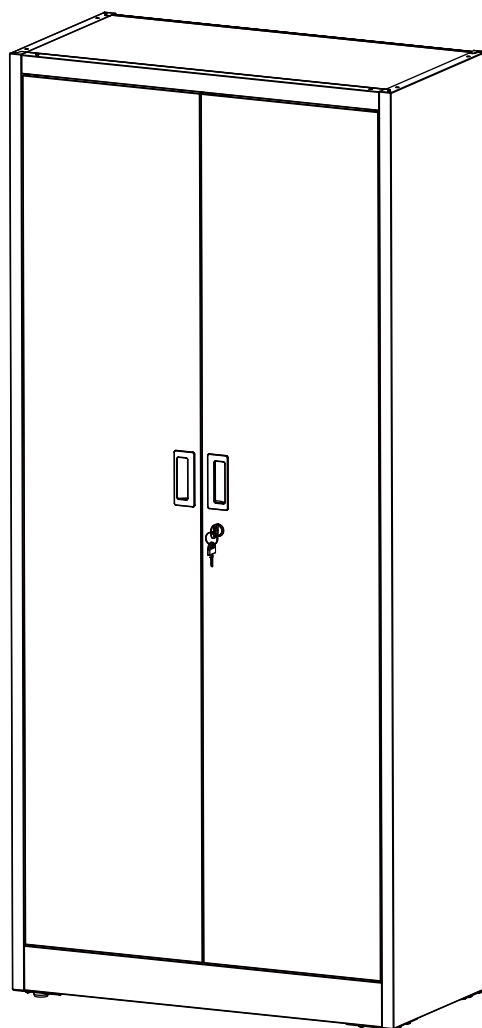

USE PRECAUTION
For your safety



INSTRUCTION
MANUAL
Read and understand



EYE PROTECTION
Must be worn



PROTECTIVE GLOVES
Must be worn when
assembly



CAUTION: Read and follow all Safety Rules and Operating instructions before first use of this product.
NOTE: Ensure all components are present. If any components are missing, do not proceed with assembly. Please send an email to service@greatstartools.com or call 877- 876-7562.

SAVE THIS MANUAL FOR FUTURE REFERENCE



Distributed by:
Hangzhou GreatStar Industrial Co., Ltd.
No.35 Jiuhuan Road, Jiubao Town,
Hangzhou 310019, China
www.greatstartools.com
MADE IN CHINA

TABLE OF CONTENTS

Safety Information-----	3
Specifications -----	3
Package Contents -----	4-5
Assembly -----	6-16
Cleaning and Maintenance -----	16
Customer Service -----	16

FOR YOUR SAFETY: CAREFULLY READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE USE.

SAFETY INFORMATION

GENERAL SAFETY INFORMATION

To reduce the risk of serious injury, read and follow the safety instructions below before assembling and using this product.

1. **This product is intended for indoor use only.**
2. **This product is not designed for commercial nor industrial usage.**

CAUTION!

- Do not exceed 180lbs per shelf of evenly distributed weight. Be aware of dynamic loading! Sudden load movement may briefly create excess load causing product failure.
- Evenly distribute the weight on each shelf, and keep the heaviest loads on the bottom shelf and small lighter items on the upper level.
- Use at least two people to move, assemble or install this product.
- Any assembly or maintenance of the product must be carried out by adults only.
- Close and lock the doors before moving this product.
- Use only on flat, level and hard surface capable of supporting the cabinet and any items placed on it.
- Maintain proper footing and balance at all times.

WARNING!

- The metal may have sharp edges or corners. The use of protective gloves is recommended.
- Do not alter this product in any manner. For example, do not weld external bar locks or attach electrical equipment. This may cause product damage or personal injury.
- Keep the product on level surfaces. The product could become unstable and it may tip over if stored or moved on an uneven surface, which may cause personal injury, death or product damage.
- DO NOT leave children unattended near this product. Cabinet may tip over if improperly opened.
- DO NOT stand on the product and do not use it as scaffold.
- Injury may result from tipping cabinet.
- You must install the tipping restraint hardware with the unit to prevent the unit from tipping and causing any accidental injury, disability, death or damage.
- The tipping restraint is intended only as a safety measure, it is not a substitute for proper adult supervision.
- This tipping restraint is not an earthquake restraint. If you wish to add the extra security of earthquake restraints, they must be purchased and installed separately.
- DO NOT allow children to climb on cabinet.
- Failure to detach this restraint before moving cabinet may result in injury and damage.

SPECIFICATIONS


Maximum Load Capacity of each shelf (evenly distributed)	180 lbs
Maximum Load Capacity of cabinet (evenly distributed)	900 lbs

PACKAGE CONTENTS

Ensure all components are present. If any components are missing, do not proceed with assembly. Please send an email to service@greatstartools.com or call 877- 876-7562.

i NOTE:

Panels D,E,F&G and Door C&H are labeled with arrows pointing up.

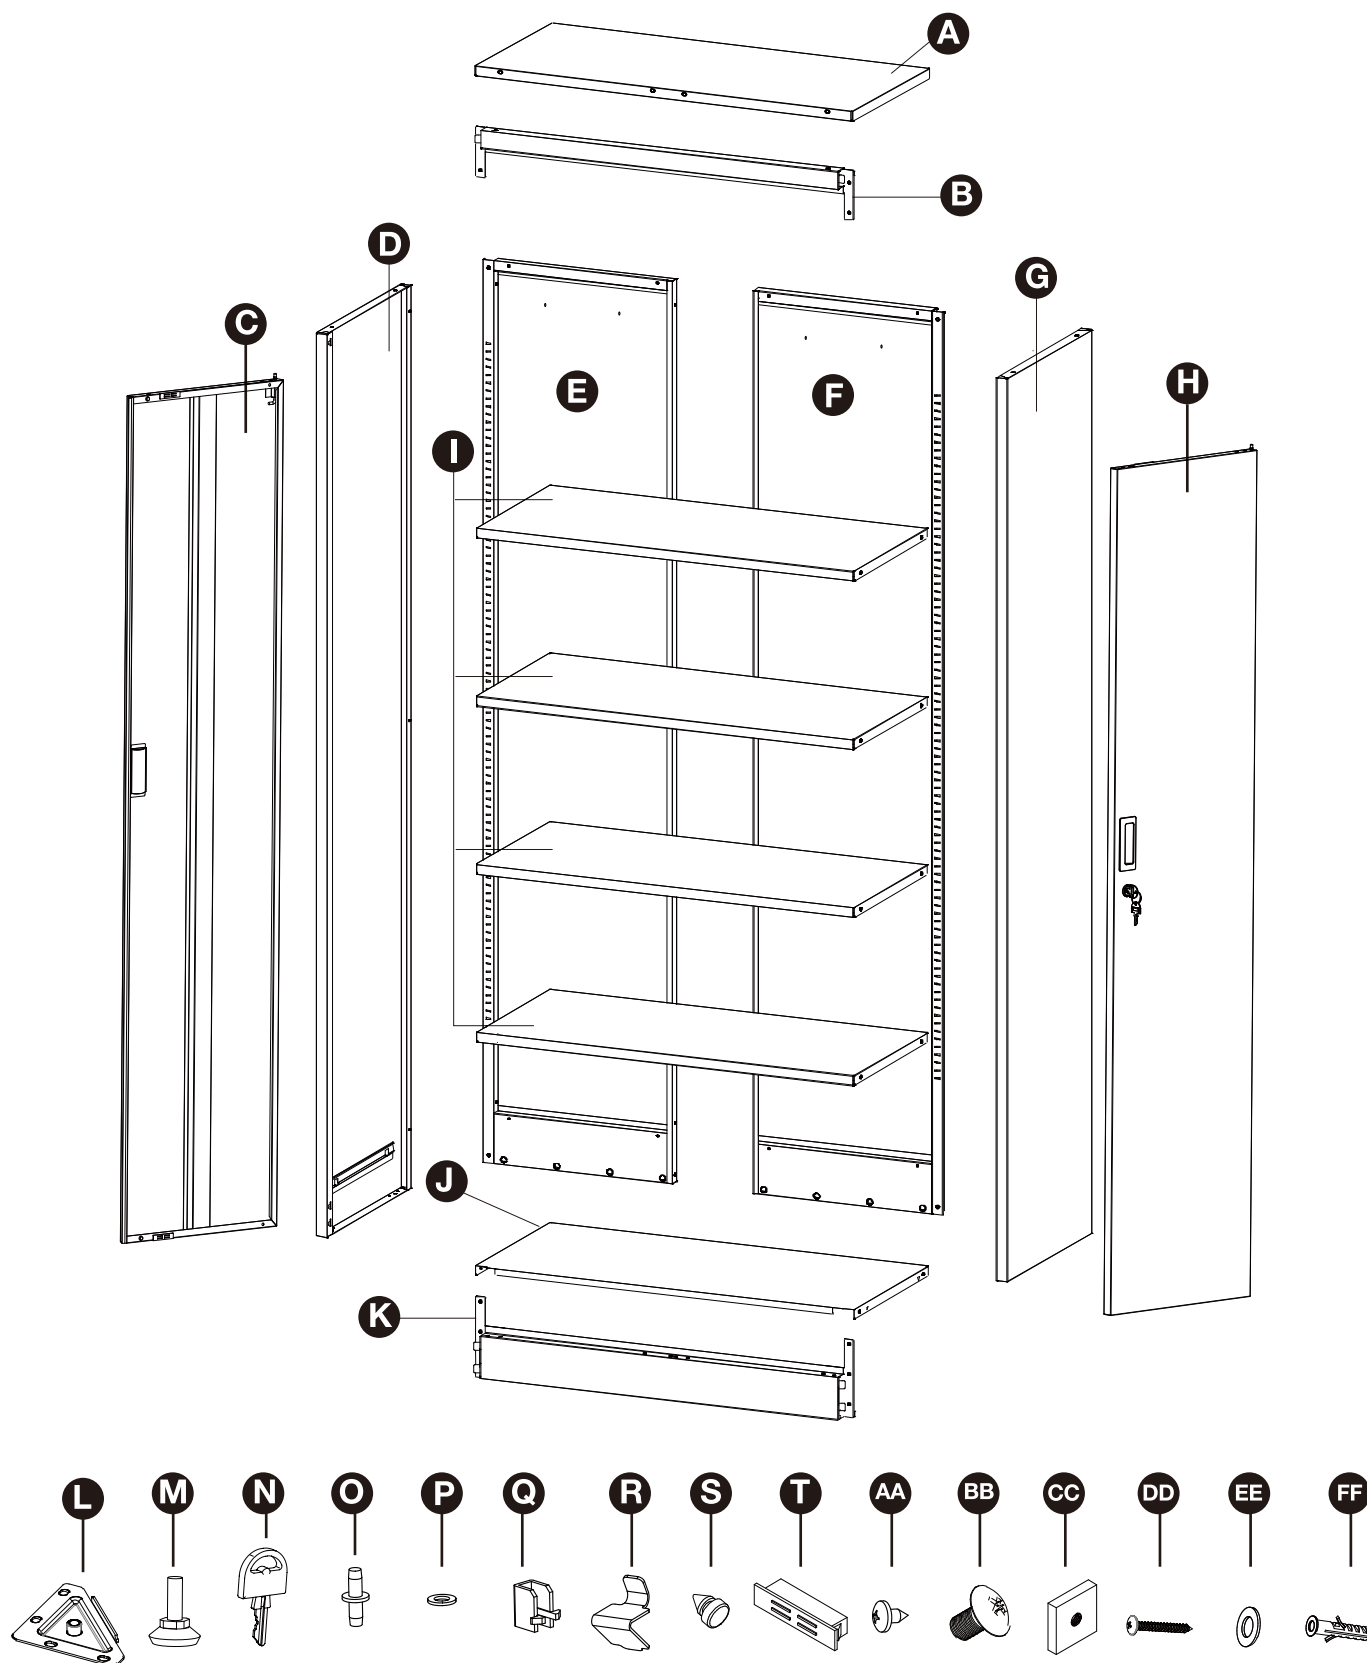

PACKAGE CONTENTS

PART	DESCRIPTION	QTY
A	Top panel	1
B	Top bracket	1
C	Left door	1
D	Left side panel	1
E	Left back panel	1
F	Right back panel	1
G	Right side panel	1
H	Right door	1
I	Shelf	4
J	Bottom panel	1
K	Bottom bracket	1
L	Corner bracket	4
M	Adjustable foot	4
N	Key	4
O	Bottom hinge pin	2
P	Plastic washer	2
Q	Plastic shelf locking clip	16+3 (Spare)
R	Metal shelf clip	16
S	Shock Pad	4+3 (Spare)
T	Magnet	4
AA	# 5 x 10mm self-tapping screw	43+3 (Spare)
BB	M5 x 8mm Bolt	3
CC	M5 Nut	3
DD	#5 x 39mm Screw	4
EE	Washer	4
FF	Anchor	4

TOOLS REQUIRED (NOT INCLUDED)

Protective Gloves



PH2 Phillips Screwdriver



Eye Protection




Pencil



Stud Finder



Electric Drill



i NOTE:

When using the electric drill ,to avoid damage to screw or holes, do not tighten the screws.


ASSEMBLY

i NOTE:

- Assemble on a flat surface. A piece of cardboard is recommended to keep the product from being scratched during assembly.
- Two people are recommended for assembly.

STEP 1: ATTACH THE BACK PANELS

Align and attach the left back panel (E) to the right back panel (F) with three M5 x 8mm bolts (BB) and M5 nuts (CC), and tighten to desired tightness with an electric drill or a PH2 Phillips screwdriver.

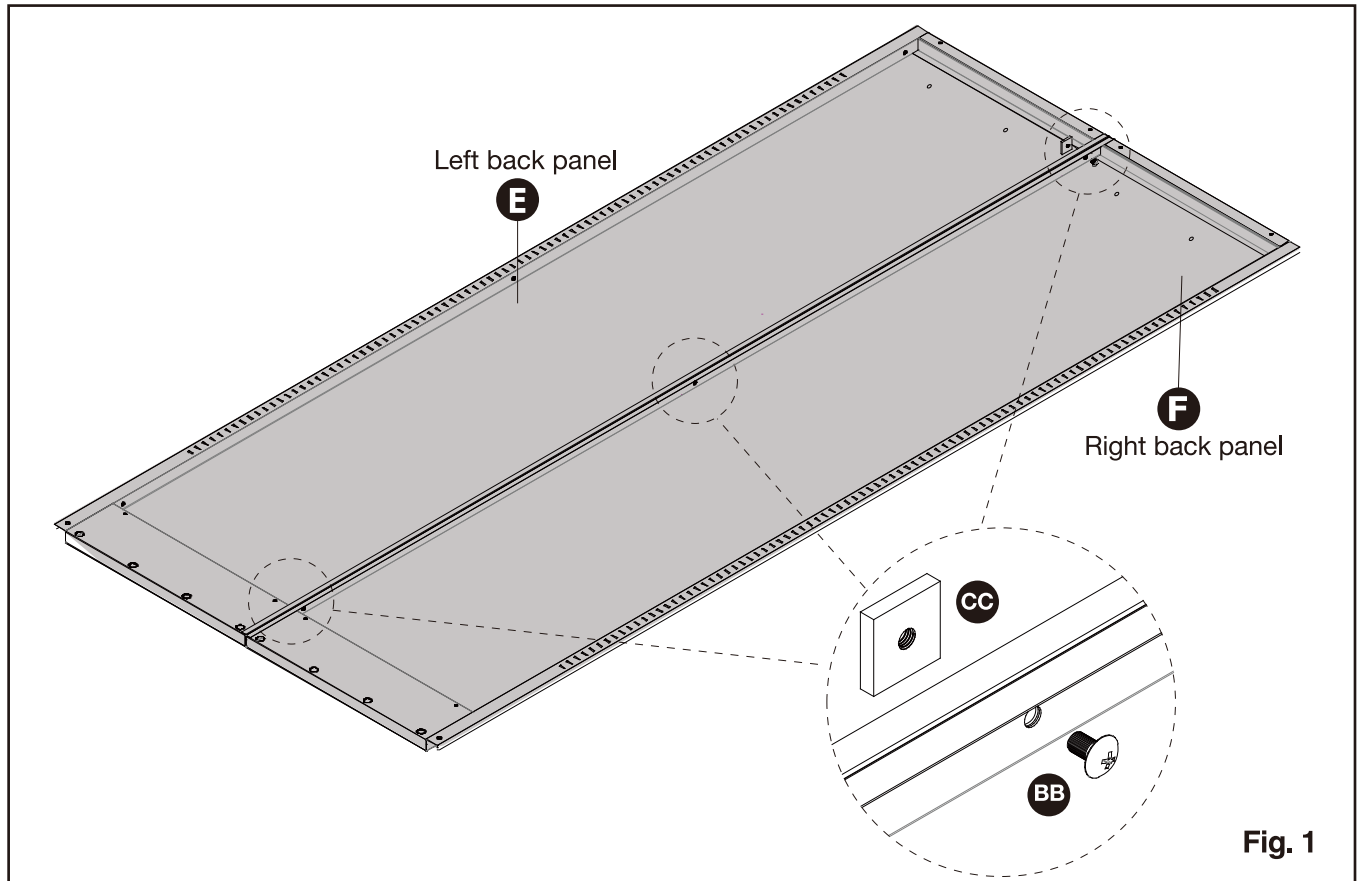


PART	E	F	BB	CC
DESCRIPTION	Left back panel	Right back panel	M5 x 8mm Bolt	M5 Nut
QTY	1	1	3	3

ASSEMBLY

STEP 2: ATTACH THE LEFT SIDE PANEL

Align and attach the left side panel (D) to the back panels (E&F) at right angles and tighten with three screws (AA) at the three indicated locations.

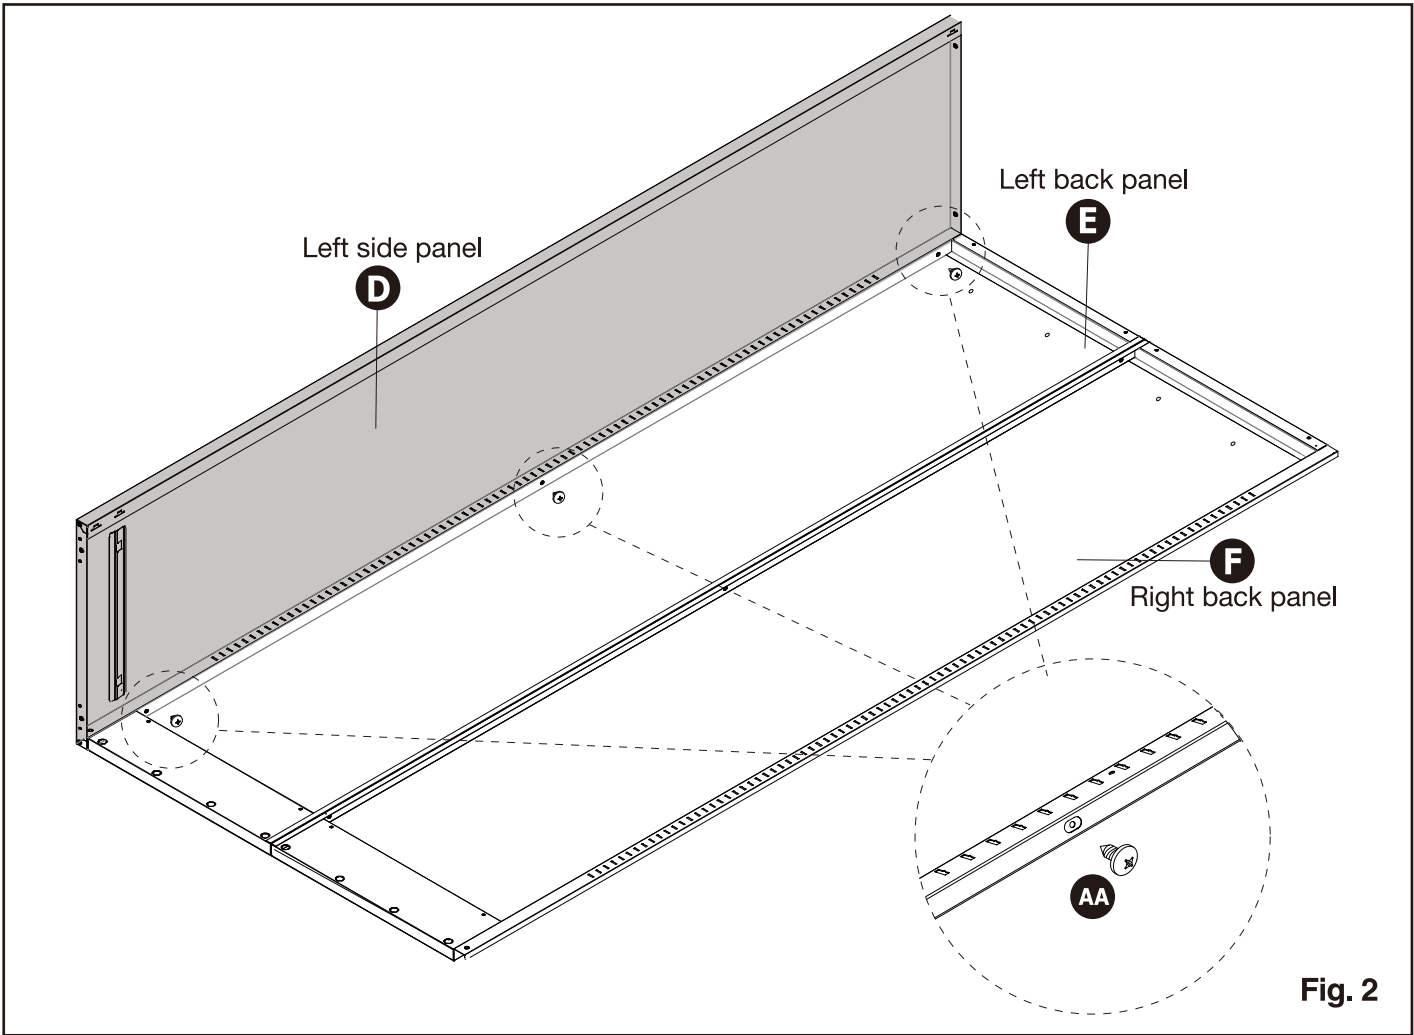


PART	D	E	F	AA
DESCRIPTION	Left side panel	Left back panel	Right back panel	Screw
QTY	1	1	1	3

ASSEMBLY

STEP 3: ATTACH THE RIGHT SIDE PANEL

Align and attach the right side panel (G) to the back panels (E&F) at right angles and tighten with three screws (AA) at the three indicated locations.

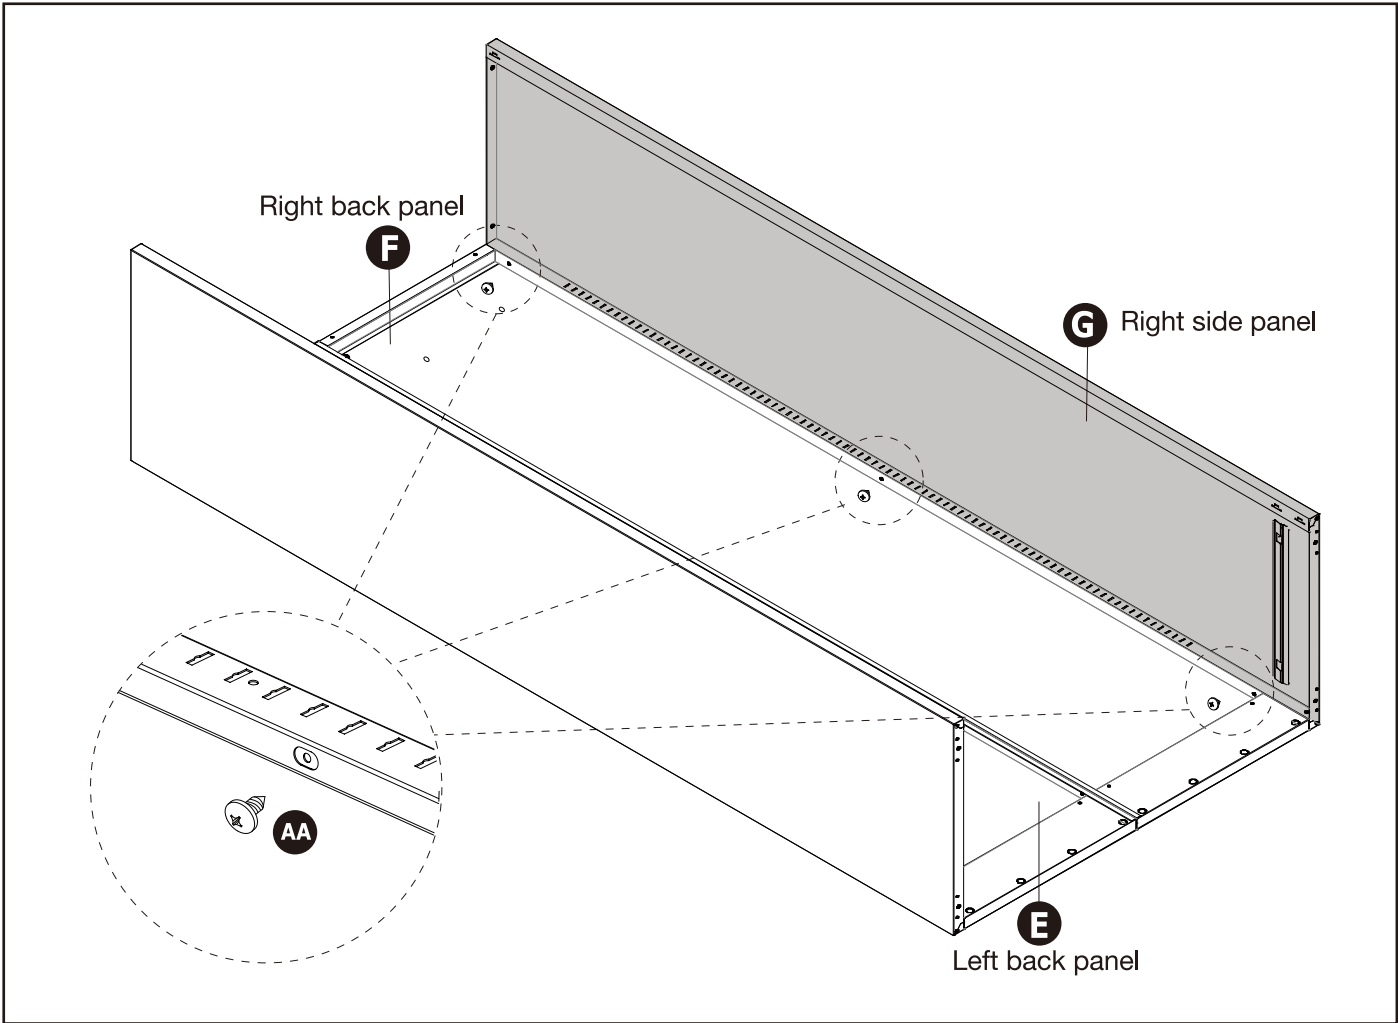


PART	E	F	G	AA
DESCRIPTION	Left back panel	Right back panel	Right side panel	Screw
QTY	1	1	1	3

ASSEMBLY

STEP 4: ATTACH THE TOP BRACKET

Attach the top bracket (B) to the side panels (D&G) and tighten with two screws(AA) each side (totally four screws).

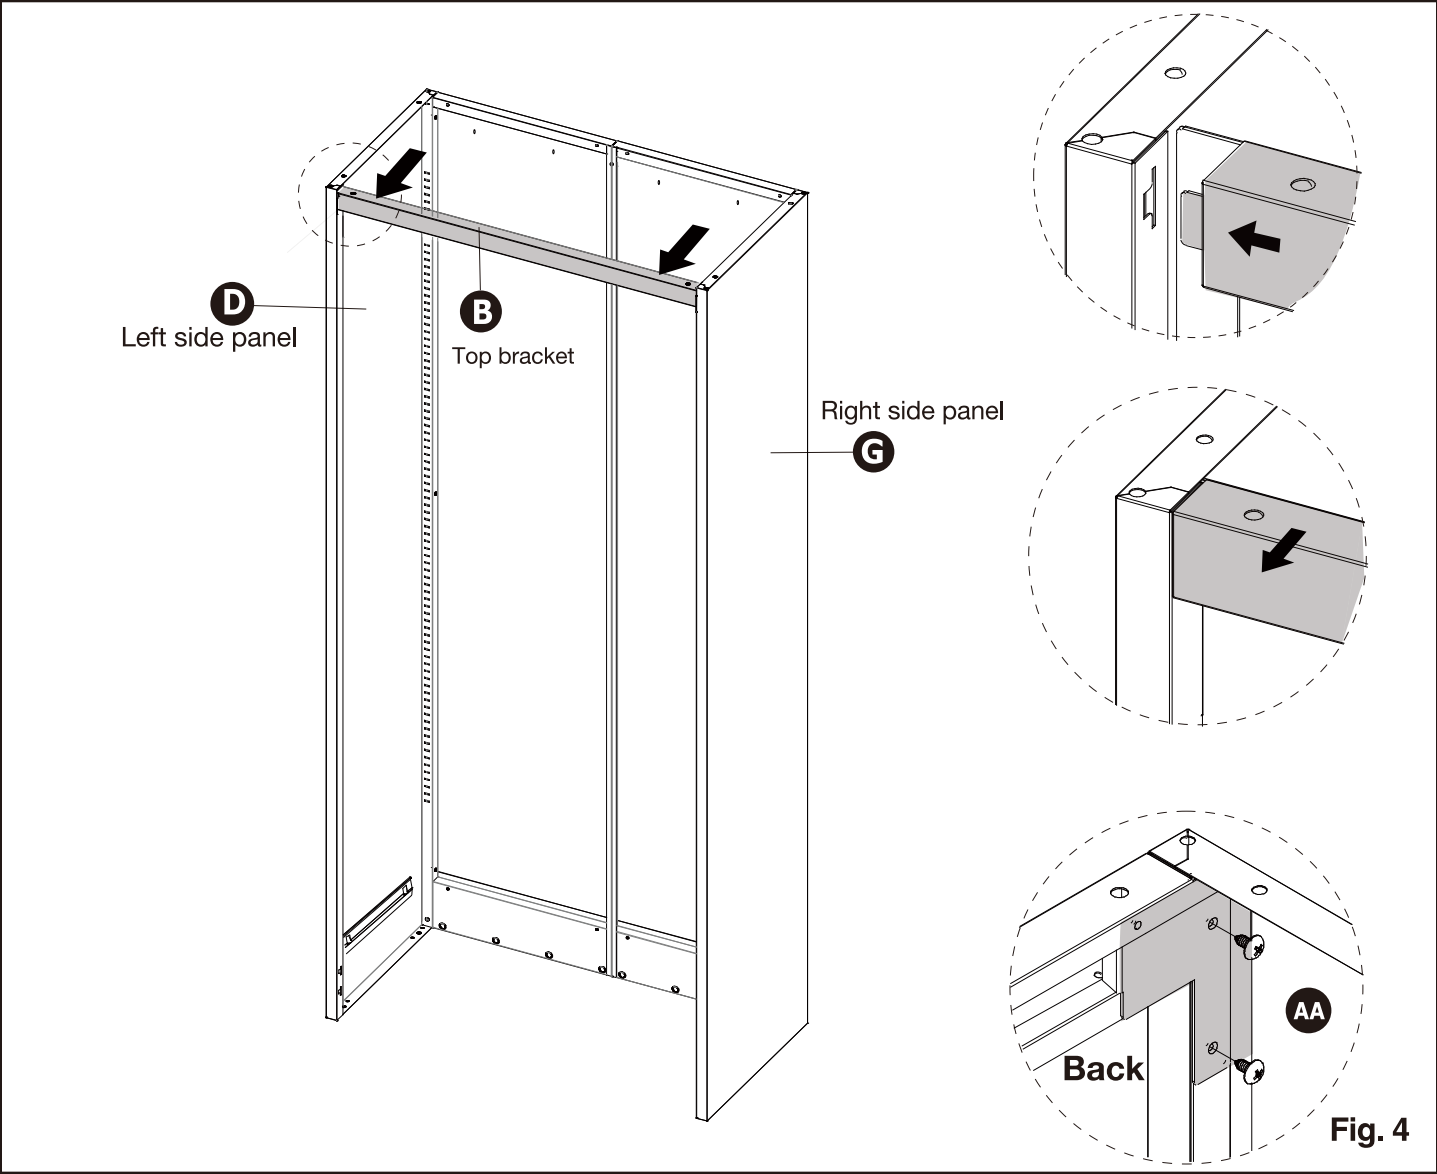


PART	B	D	G	AA
DESCRIPTION	Top bracket	Left side panel	Right side panel	Screw
QTY	1	1	1	4

ASSEMBLY

STEP 5: ATTACH THE BOTTOM BRACKET

Attach the bottom bracket (K) to the side panels (D&G) and tighten with three screws (AA) each side(- totally six screws).

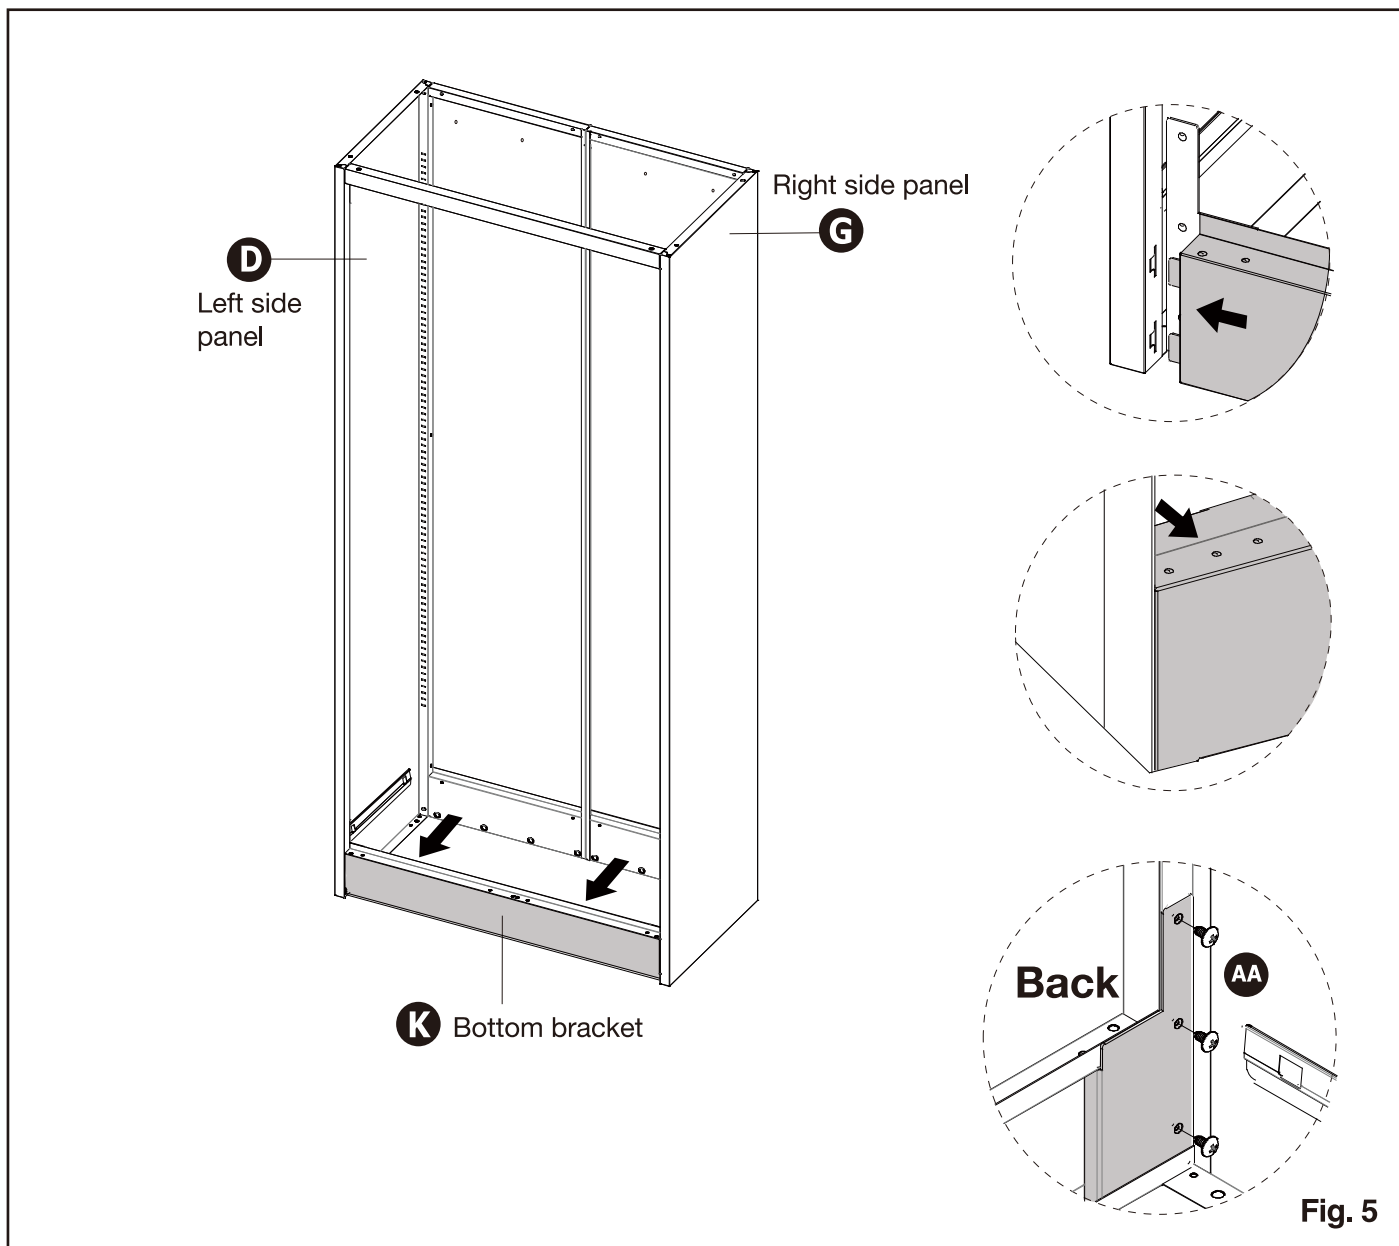


PART	D	G	K	AA
DESCRIPTION	Left side panel	Right side panel	Bottom bracket	Screw
QTY	1	1	1	6

ASSEMBLY

STEP 6: ATTACH THE BOTTOM PANEL

Slide the bottom panel (J) to the cabinet frame and secured with four screws (AA) on the bottom. Make sure the notch on the edge of bottom panel (J) face forward.

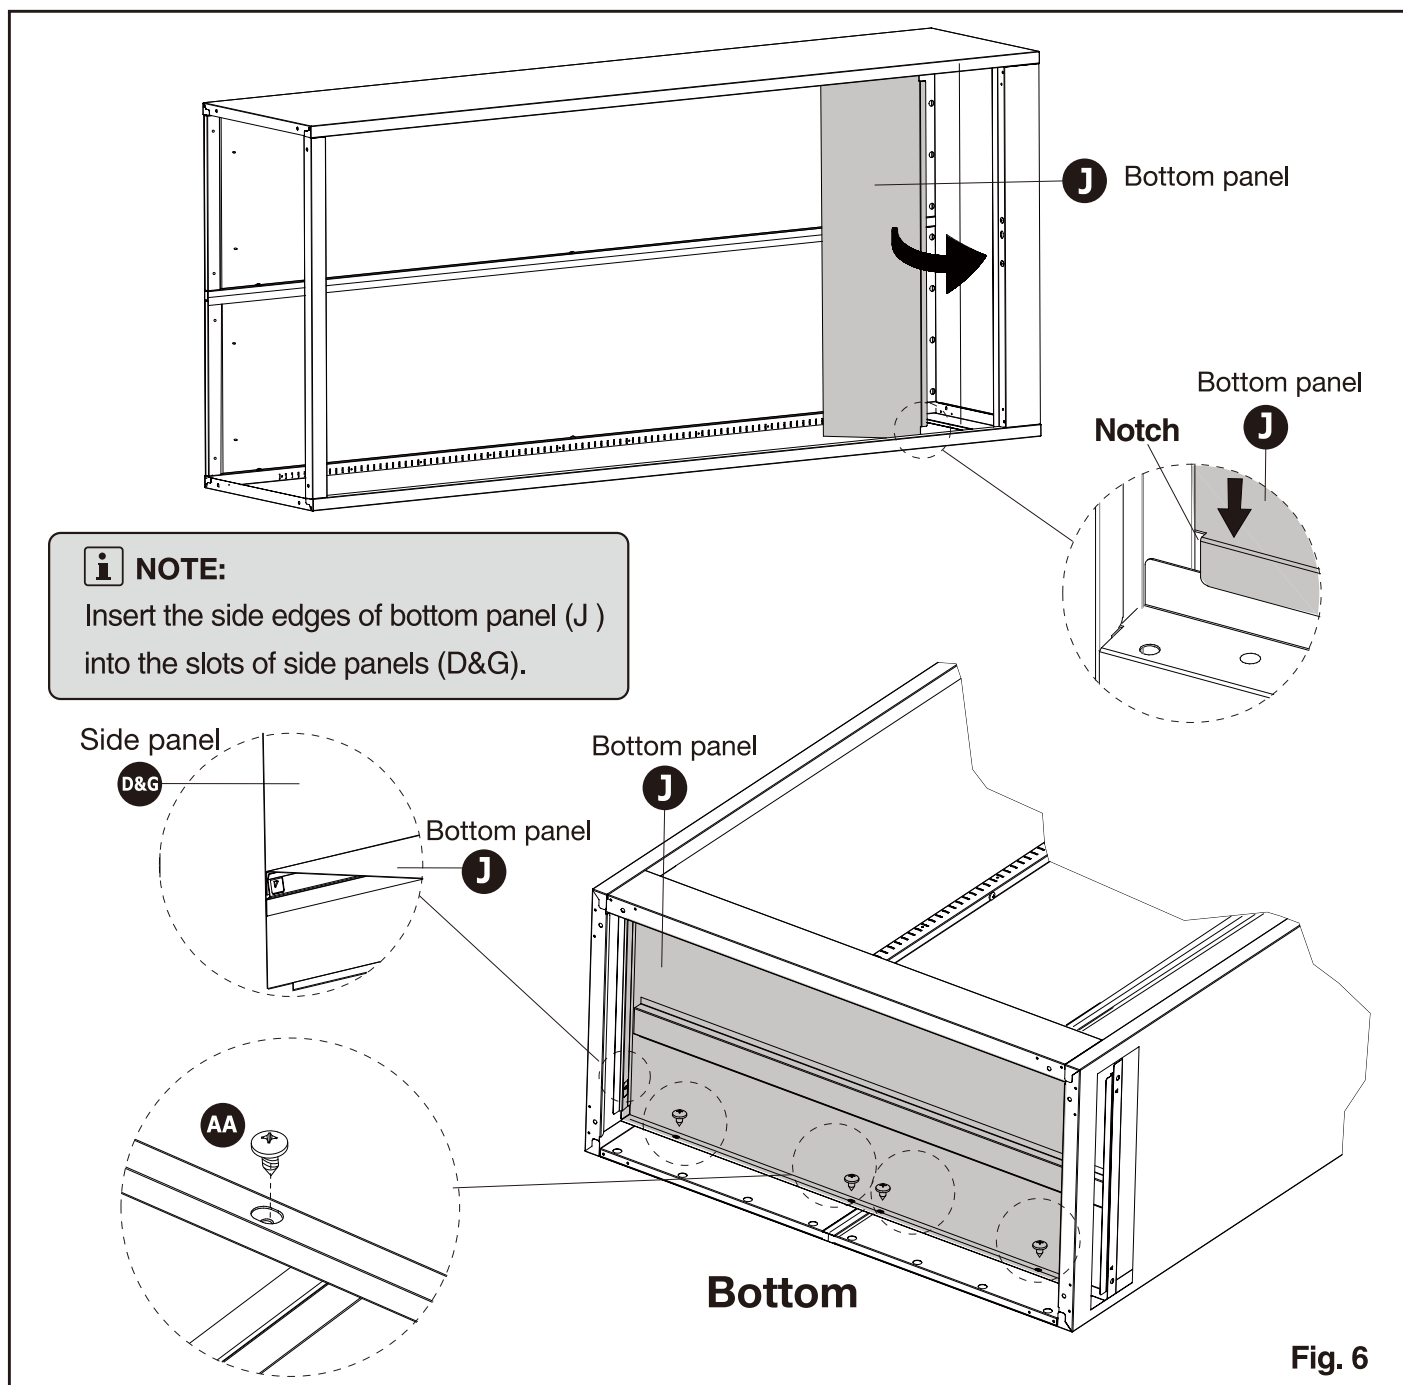


PART	J	AA
DESCRIPTION	Bottom panel	Screw
QTY	1	4

ASSEMBLY

STEP 7: ATTACH THE TOP PANEL

Attach the top panel (A) to the top of the cabinet frame and secured with seven screws (AA).

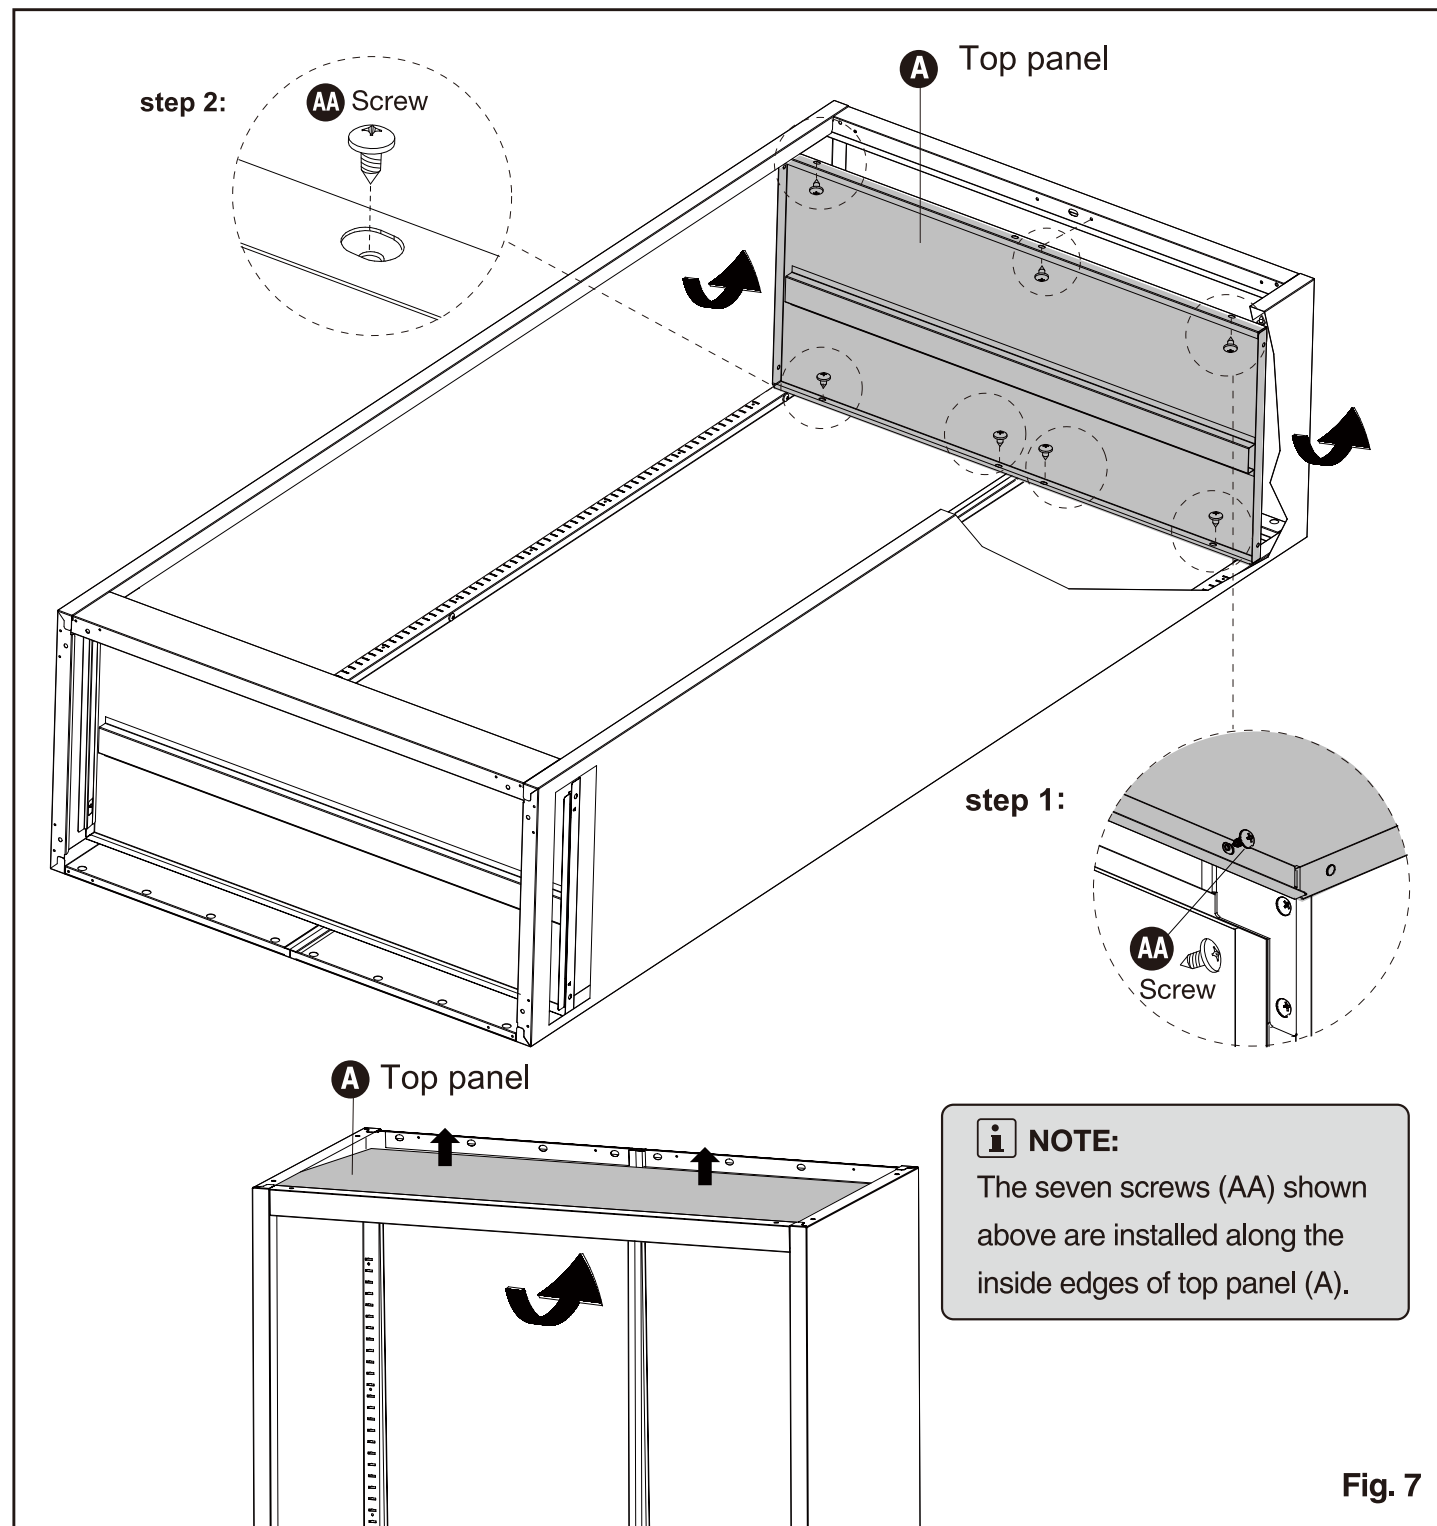

PART	A	AA
DESCRIPTION	Top panel	Screw
QTY	1	7

ASSEMBLY

STEP 8: ATTACH THE CORNER BRACKET

Attach four corner brackets (L) to the bottom of cabinet and secured with sixteen screws (AA).

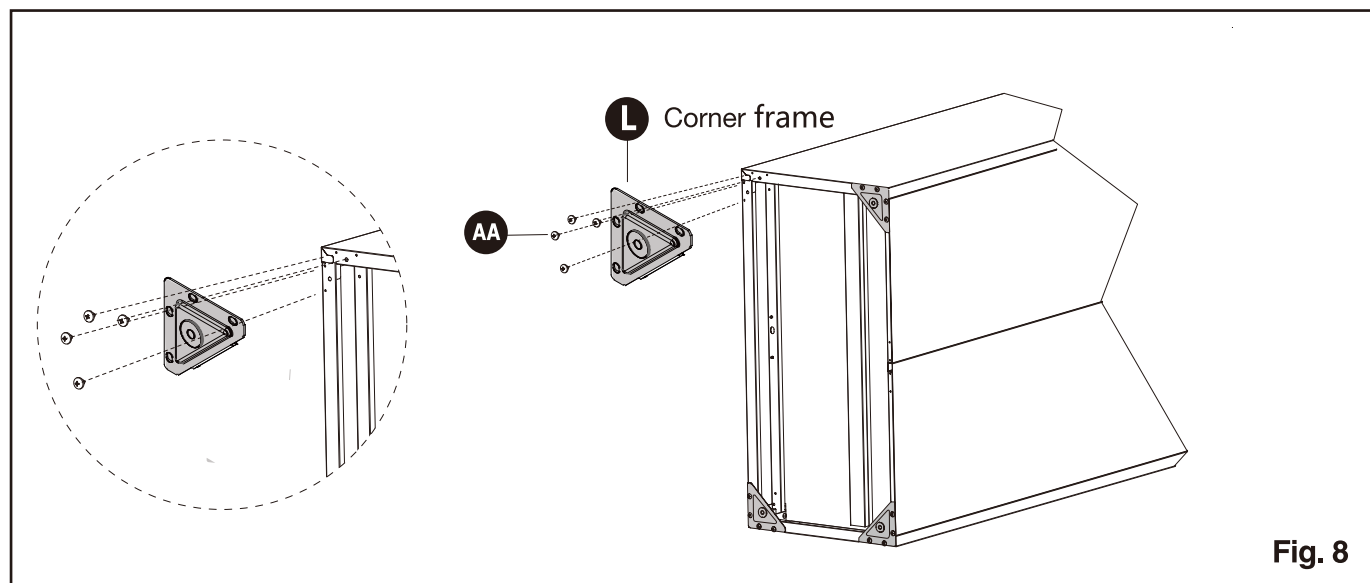


Fig. 8

PART	L	AA
DESCRIPTION	Corner bracket	Screw
QTY	4	16

STEP 9: ATTACH THE ADJUSTABLE FEET

Install four adjustable feet (M) to the bottom of cabinet clockwise and tighten to level.

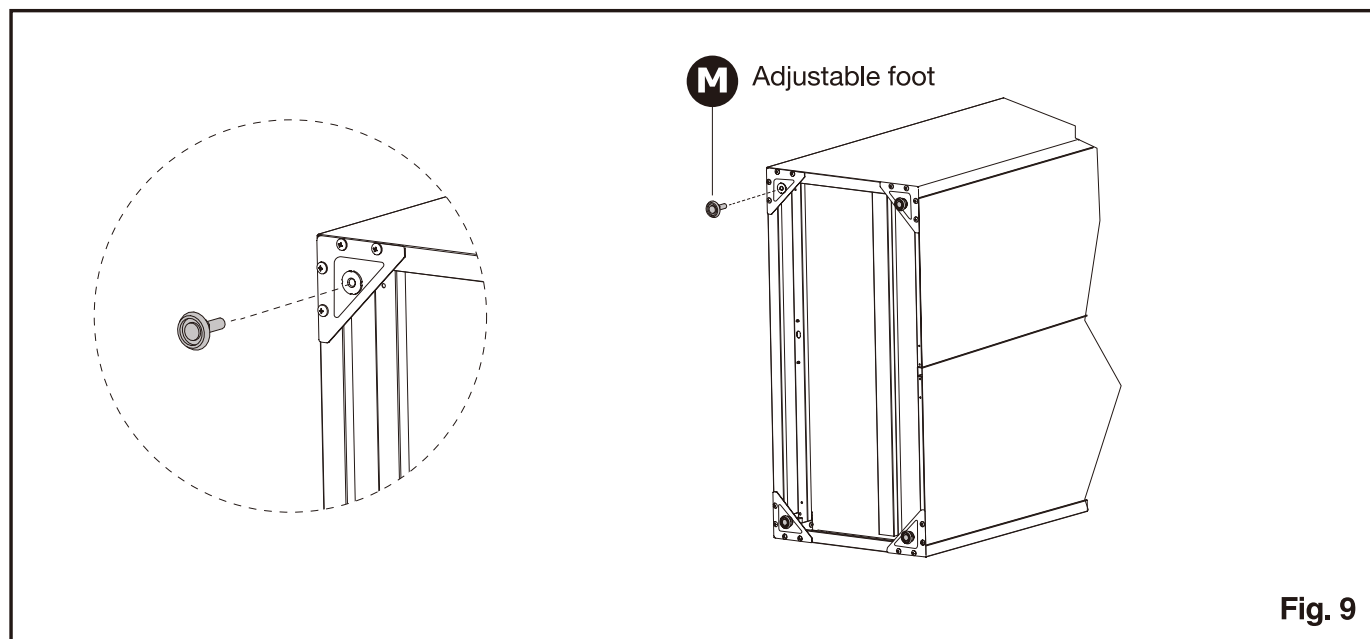


Fig. 9

PART	M
DESCRIPTION	Adjustable foot
QTY	4

ASSEMBLY

STEP 10: INSTALL THE SHELVES


- Before placing shelves, place four metal clips (R) into perforated slots at the same height for each shelf location.

i NOTE:

The holes between the slots help with horizontal positioning.

- Place the shelves (I) on top of metal clips (R).
- After installing shelves, place a plastic clip(Q) at corner to lock shelves in place.

Tip: Inserting one end of plastic clip (Q) next to the panel and squeezing the other end help install well.

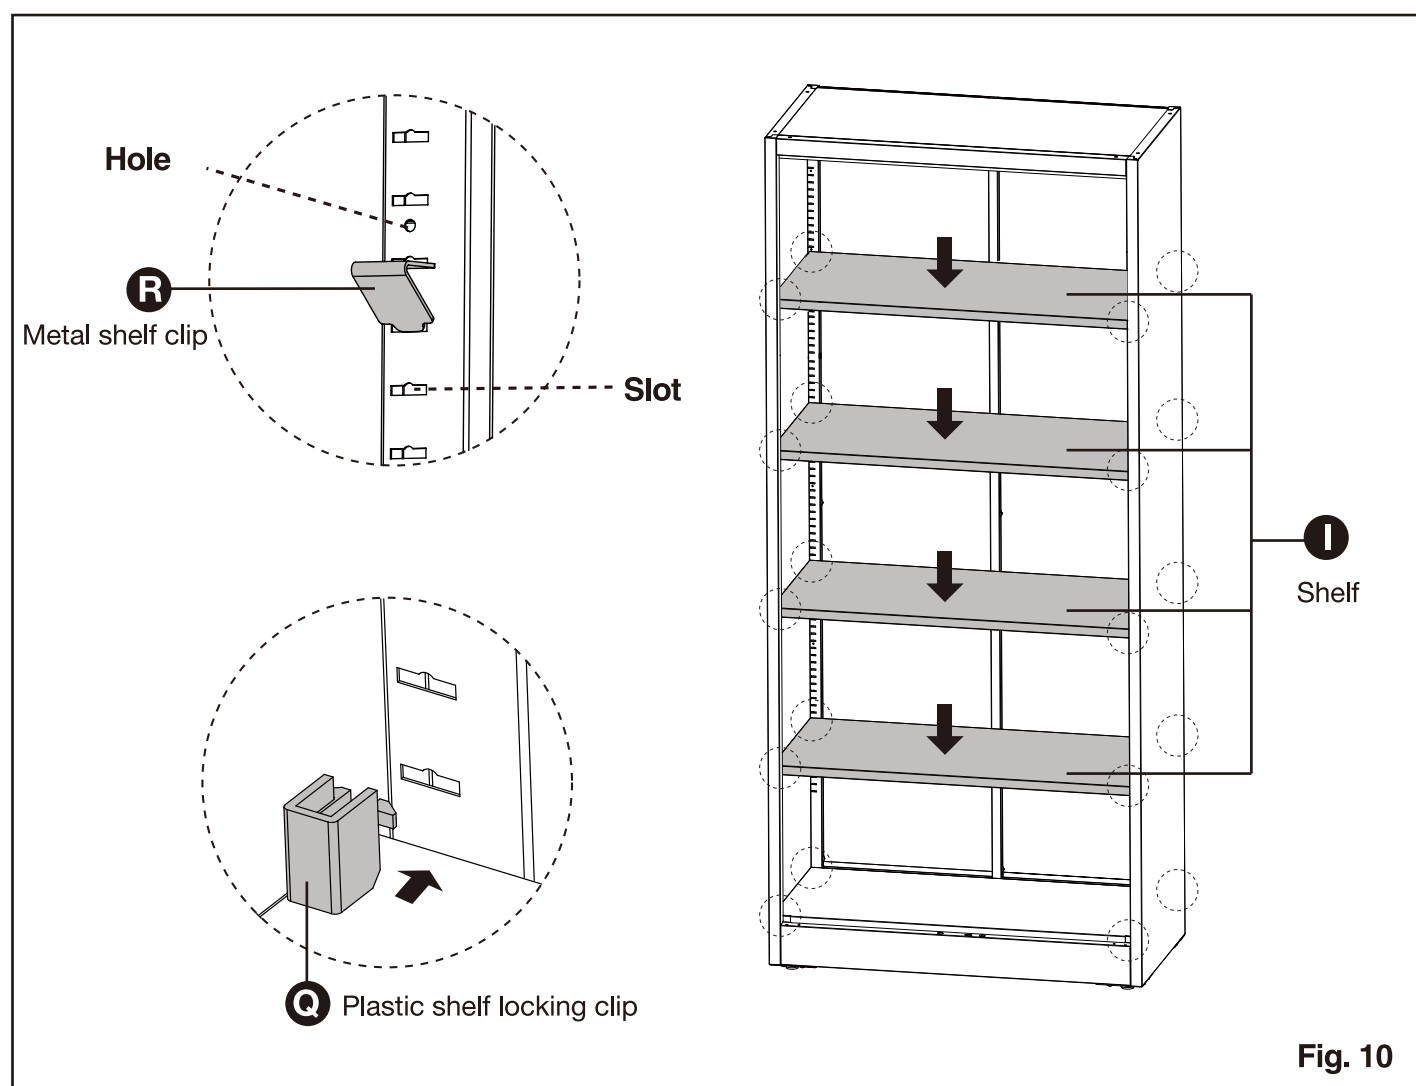

PART	I	Q	R
DESCRIPTION	Shelf	Plastic shelf locking clip	Metal shelf clip
QTY	4	16	16

ASSEMBLY

STEP 11: ATTACH THE DOORS

- Install bottom hinge pin (O) and washer (P) on each side of the bottom bracket (K). Make sure the washer (P) is on the bottom hinge pin (O).
- Lower the left door (C) onto bottom left bottom hinge pin, then swing the left door (C) into top bracket (B) while pulling down on the latch, align latch with hole in top bracket (B) and release when latch is in position.
- Repeat above step for right door (H).
- Install four shock pads (S) and magnets (T) on the doors (C&H).
- Insert key (N) into lock to verify proper operation.

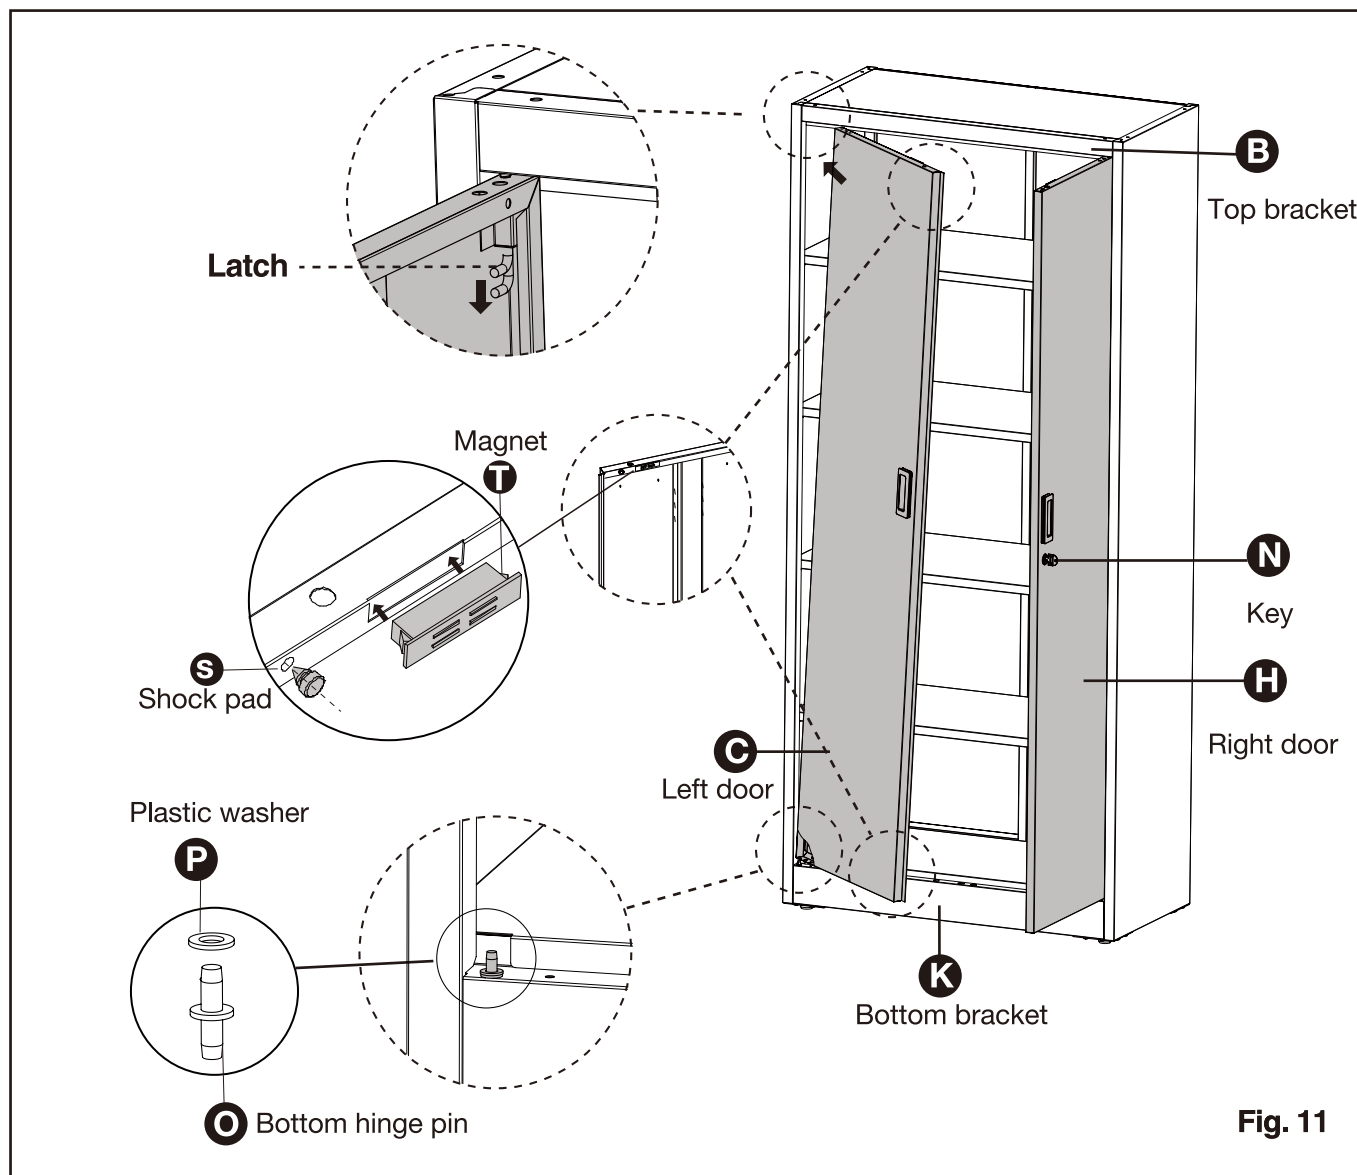


Fig. 11


PART	C	H	N	O	P	S	T
DESCRIPTION	Left door	Right door	Key	Bottom hinge pin	Plastic washer	Shock pad	Magnet
QTY	1	1	1	2	2	4	4

ASSEMBLY

STEP 12: INSTALL THE CABINET TIPPING RESTRAINT


OPTION 1: INSTALL THE CABINET TIPPING RESTRAINT TO WOOD STUDS

- Use the stud finder to find the wood stud and confirm the suitable installation position. (The hole on the cabinet is designed for studs 16" apart).
- Align the hole on the cabinet and attach the cabinet to the wood stud with a washer (EE) and #5x39mm screw (DD) with an electric drill or a PH2 Philips screwdriver.
- Repeat the above step to secure the other hole.

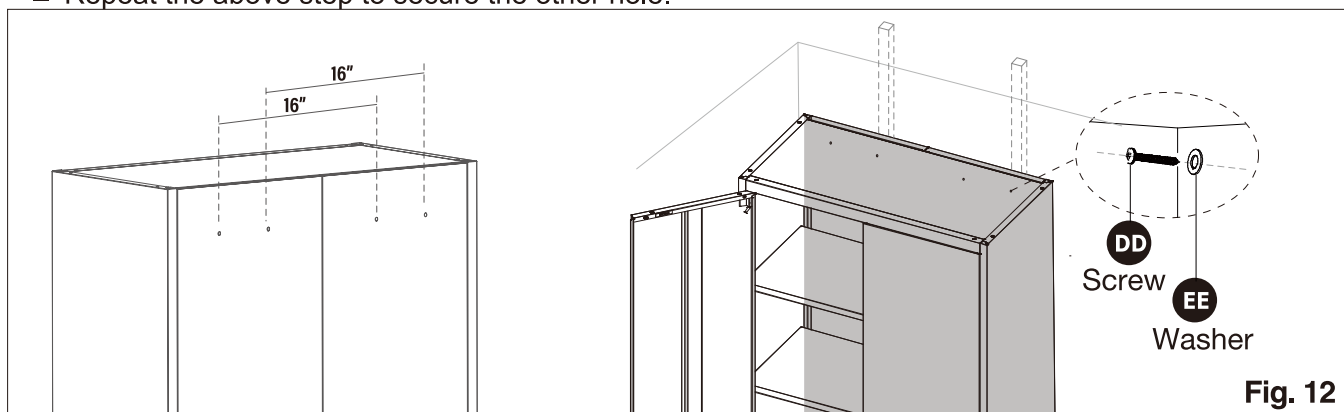

OPTION 2: INSTALL THE CABINET TIPPING RESTRAINT TO SOLID CONCRETE WALL

- Confirm the suitable installation position according to your actual need. (The hole on the cabinet is designed for 16" apart). Make the screw points through the holes.
- Drill a 1 1/2" (38.8mm) deep 5/16" (8mm) diameter pilot hole using 5/16" (8mm) drill bit at the center of each marked point.
- Put the anchor (FF) into the holes.
- Align the hole on the cabinet with the anchor, and attach the cabinet to the solid concrete wall with a washer (EE) and #5x39mm screw (DD) with an electric drill or a PH2 Philips screwdriver.
- Repeat the above step to secure the other hole.

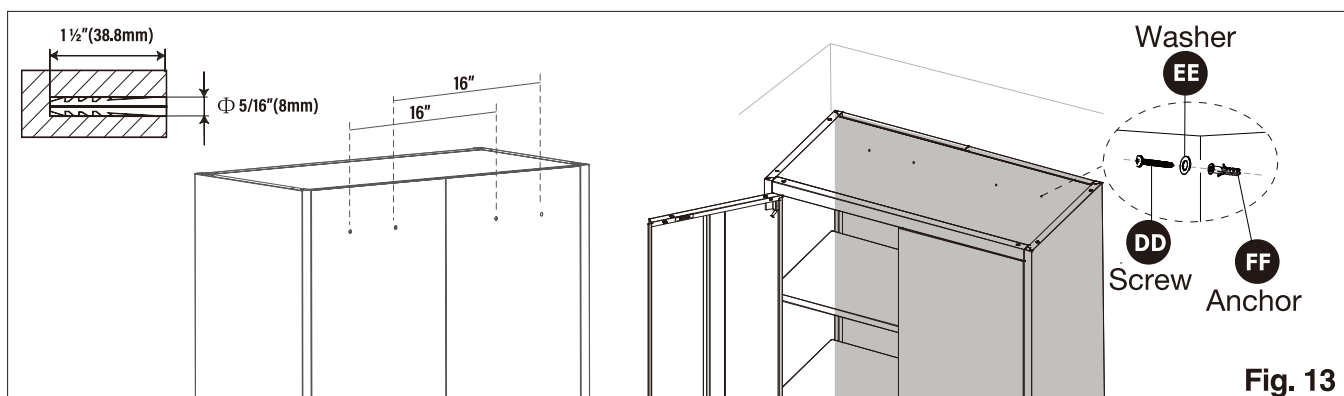

STEP 13: ADJUST THE LEVEL WITH ADJUSTABLE FEET

Adjust each adjustable foot (M) to the desired elevation by turning the adjustable foot counterclockwise to elevate and clockwise to lower the adjustable foot.

CLEANING AND MAINTENANCE

- Wipe with a dry cloth as needed to remove dust and dirt.
- Avoid contact with corrosive substances like acids, alkaline or similar substances.

CUSTOMER SERVICE

If you are having difficulty in using this product and require support, please send an email to service@greatstartools.com or call 877-876-7562.