


WORKPROX

WX125385A

ORIGINAL OPERATING INSTRUCTIONS 36W ULTRA-THIN GaN CHARGER



Distributed by:
Hangzhou GreatStar Industrial Co., Ltd.
No.35 Jiuquan Road, Shangcheng District,
Hangzhou 310019, China
www.greatstartools.com
MADE IN CHINA

Safety Precautions

1. Read this instructions carefully. Keep this instructions for later reference.
2. All cautions and warnings should be followed.
3. The equipment shall be used at maximum 25°C ambient temperature.
4. Do not open the equipment to reduce the risk of electrical shock. For safety reasons it is only allow to be opened by qualified service personnel.
5. Protect equipment from humidity.
6. Equipment has to be protected from objects falling through or liquids dripping through the openings. This could cause a fire or electrical shock.
7. Disconnect equipment from power supply before cleaning. Do not use any liquid or aerosol cleaner. Use only moistured cloth.
8. If the equipment is not used for long time, disconnect the equipment from power supply to avoid being damaged by voltage peaks or lightning strike.

9. If one of the following situations arise, equipment has to be checked by qualified service personnel:
- Liquid has penetrated into the equipment.
 - Equipment has been exposed to humidity.
 - Equipment has been dropped and/or is damaged.
 - Equipment has obvious sign of breakage.
 - Equipment does not work well or you can not get it working according to user's manual.
10. The equipment shall not be exposed to dripping or splashing and no object filled with liquids, such as vases, shall be placed on the equipment.
11. Where the mains plug is used as the disconnect device, the disconnect device shall remain readily operable.
12. Please notify the user to use the accessories or devices which to be charged by that adaptor should be with fire enclosure rated min.V-1.


Technical Data

Model No.	WX125385A
Input	100-240V~ 50/60Hz 1.0A Max
Output	5V≡3A, 9V≡3A, 12V≡2.5A, 15V≡2A, 20V≡1.8A, 36W Max.
Supported Fast Charging Protocols	BC1.2 / Apple 2.4A / PD 2.0 / PD 3.0 / QC 2.0 / QC 3.0 / QC 4.0+ / Huawei FCP / Samsung AFC / Huawei SCP
Size	2.6×1.6×0.5" (66×40.7×12.8mm)
Net Weight	Approx. 1.66oz (47g)

Items Supplied

Chargerx1, Dual USB-C Cablex1, User manualx1

Operation

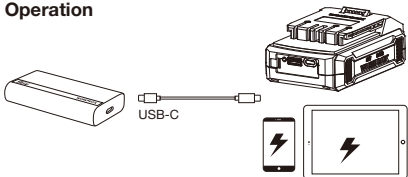

Our charger is equipped with a dual USB-C cable. If you use other charging cables, please note the following requirements:

■ To maximize charging speed (up to 36W) and prevent cable damage:

For Type-C port devices: Use cables rated for 3A or higher.

For Apple Lightning port devices: Use cables rated for 2.4A or higher.

Disposal

Disposal of the appliance



This symbol indicates that this product shall not be treated as household waste. Instead it shall be handed over to the applicable collection point for the recycling of electrical and electronic equipment.

Disposal of the packaging



The packaging consists of cardboard and correspondingly marked plastics that can be recycled. Make these materials available for recycling.

Manufacturer:

Guangdong Tiantongjiuheng Technology Co.,Ltd
Changlonggang Industrial Zone (Building 2), Shatian Town, Huiyang
District,HUIZHOU Guangdong Province 518103

WORKPROX